




THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL

/	
RoHS 2002/95/EC	

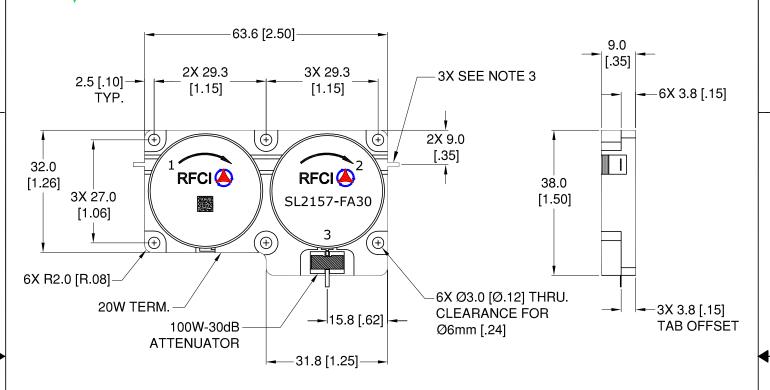

Specifications

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	728		756
Insertion Loss (dB)		< .40	0.60
Isolation (dB)	45	> 55	
Return Loss (dB)	22	> 25	
FWD IMD: 2T at 37W per T 5MHz Spacing (dBc)		75	

Power & Temperature Ratings

Parameter	Maximum
Forward PWR Peak/AVG	1000/200 Watts
Reverse Power CW	100 Watts
Attenuator Rating (See Note 2)	100 Watts
Attenuation (P3)	30dB±1dB
Operating Temperature	-40 to +85° C
Storage Temperature	-40 to +95° C

Notes:

- 1. Typical Values Represent Mid-Band Performance @ +23 °C.
- 2. Iso-Attenuator Flange held to +85°C; 30 Mins. maximum Duration
- 3. Tab Dims: 1.00[.039]Width x 3.0[.12]Length x .20[.008]Thick

CW 100W DUAL ISO-ATTENUATOR MODEL: SL2157-FA30

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS [INCHES]: TOLERANCES ARE:	THIRD ANGLE PROJECTION	1					
1 PLACE DECIMAL ±.2 [±.01] ANGULAR: ±1.0° SURFACE ROUGHNESS 16/	APPROVALS	DATE		K	- (3)		
REMOVE ALL BURRS AND BREAK SHARP EDGES. SURFACE TEXTURE TO BE IN ACCORDANCE WITH LATEST ANSI B46.1	DRAWN BY: HV	05/08/13					
DIMENSIONING & TOLERANCING IN ACCORDANCE WITH LATEST ANSI Y14.5	CHECKED BY: P.T	05/09/13					
PROPRIETARY NOTE: "THE INFORMATION CONTAINED ON THIS DOCUMENT IS CONSIDERED TO BE CONFIDENTIAL MATERIAL PROPRIETARY TO RE	DESIGN BY: P.T	04/01/13					
CIRCULATOR ISOLATOR Inc. (RFCI) AND IS PROVIDED SOLELY FOR INFORMATION PURPOSES.	ENGINEER BY: P.T	04/01/13	OUTLINE/SPECS				
THIS INFORMATION SHALL NOT BE USED BY ANYONE OTHER THAN RFCI TO DESIGN OR CONSTRUCT ANY OF THE ITEMS DEPICTED, NOR SHALL IT BE	MFG. ENGR. L.T	05/10/13	SIZE	CAGE NO.	DWG NO.		REV.
DISCLOSED, DUPLICATED, OR COPIED FOR ANY PURPOSE, NOR MADE	Q.A.			0/102 110.		-FA30-OS	1
AVAILABLE TO ANY THIRD PARTY WITHOUT THE PRIOR WRITTEN CONSENT OF A RFCI OFFICIAL."	PROG. MGMT/MKT		А		SL2137	-FA30-OS	•
DO NOT SCALE DRAWING			SCALE	: FULL		SHEET 1 OF 1	
	_				•	•	