
DWG. NO. SL2137F-OS SHT REV

THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY.

REVISIONS						
REV.	DESCRIPTION	ECO	DATE	APPROVED		
1	INITIAL RELEASE	I.R.	04/25/13	P.T		



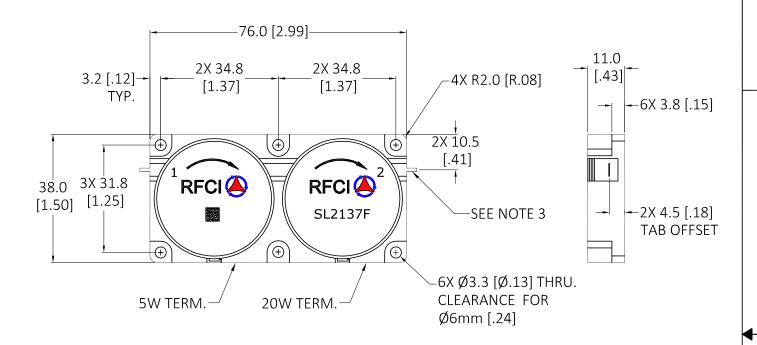

Specifications

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	450		500
Insertion Loss (dB)		< .50	0.70
Isolation (dB)	40	> 48	
Return Loss (dB)	20	> 23	

Notes:

- 1. Typical Values Represent Mid-Band Performance @ +23 °C.
- 2. Isolator Flange held to $+85^{\circ}\text{C}$; 30 Min. maximum Duration.
- 3. Tab Dims: 1.00[.039]Width x 3.0[.12]Length x .20[.008]Thick

Power & Temperature Ratings

Parameter	Maximum	
Forward PWR Peak/AVG	1000/200 Watts	
Reverse Power CW	20 Watts	
Termination Rating (See Note 2)	20 Watts	
Operating Temperature	-20 to +85° C	
Storage Temperature	-40 to +90° C	

CW 20W DUAL JUNCTION ISOLATOR MODEL: SL2137F

