
DWG. NO. SL3822-0S SHT REV

THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY.

	REVISIONS			
REV.	DESCRIPTION	ECO	DATE	APPROVED
1	INITIAL RELEASE	I.R.	08/20/13	P.T



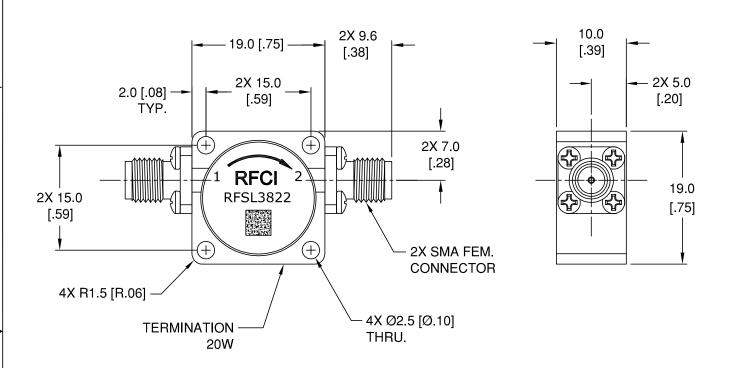

Specifications

Minimum	Typical	Maximum
2300		2700
	< .30	.40
20	> 23	
20	> 23	
	2300	2300 < .30 < 20 > 23

Notes:

- 1. Typical Values Represent Mid-Band Performance @ +23 °C.
- 2. Isolator Flange held to +85°C; 30 Min. maximum Duration.

Power & Temperature Ratings

Parameter	Maximum
Forward PWR Peak/AVG	1000/100 Watts
Reverse Power CW	20 Watts
Termination Rating (See Note 2.)	20 Watts
Operating Temperature	-40 to +85° C
Storage Temperature	-40 to +95° C

CW 20W SMAf ISOLATOR MODEL: RFSL3822

