
DWG. NO. SL3830-0S SHT REV

THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY.

L	REVISIONS							
Γ	REV.	DESCRIPTION	ECO	DATE	APPROVED			
	1	INITIAL RELEASE	I.R.	08/20/13	P.T			



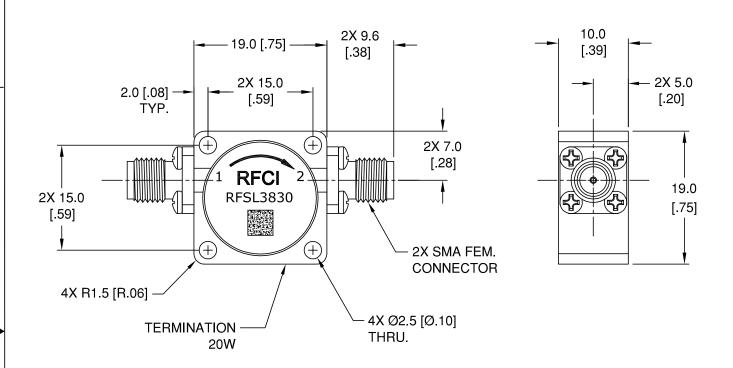

Specifications

Minimum	Typical	Maximum
3300		3800
	< .30	.40
20	> 23	
20	> 23	
	3300	3300 < .30 < .30 > 23

Notes:

- 1. Typical Values Represent Mid-Band Performance @ +23 °C.
- 2. Isolator Flange held to +85°C; 30 Min. maximum Duration.

Power & Temperature Ratings

Parameter	Maximum		
Forward PWR Peak/AVG	1000/100 Watts		
Reverse Power CW	20 Watts		
Termination Rating (See Note 2.)	20 Watts		
Operating Temperature	-40 to +85° C		
Storage Temperature	-40 to +95° C		

CW 20W SMAf ISOLATOR MODEL: RFSL3830

UNLESS OTHERWISE SPECIFIED all dimensions are in millimeters (inches): tolerances are:	THIRD ANGLE PROJECTION		DECL (A)				
1 PLACE DECIMAL ±.2 [±.01] ANGULAR: ±1.0° 2 PLACE DECIMAL ±.10 [±.004] SURFACE ROUGHNESS 16/	APPROVALS	DATE			TVI ሂ		
REMOVE ALL BURRS AND BREAK SHARP EDGES. SURFACE TEXTURE TO BE IN ACCORDANCE WITH LATEST ANSI B46.1	DRAWN BY:						
DIMENSIONING & TOLERANCING IN ACCORDANCE WITH LATEST ANSI 946.1	CHECKED BY:		TITLE				
PROPRIETARY NOTE: "THE INFORMATION CONTAINED ON THIS DOCUMENT IS CONSIDERED TO BE CONFIDENTIAL MATERIAL PROPRIETARY TO RF	DESIGN BY:		OUTLINE/SPECS				
CIRCULATOR ISOLATOR Inc. (RFCI) AND IS PROVIDED SOLELY FOR INFORMATION PURPOSES.	ENGINEER BY:		OOTLINE/OFLOO				
THIS INFORMATION SHALL NOT BE USED BY ANYONE OTHER THAN RFCI TO DESIGN OR CONSTRUCT ANY OF THE ITEMS DEPICTED, NOR SHALL IT BE	MFG. ENGR.		SIZE	CAGE NO.	DWG NO.		REV.
DISCLOSED, DUPLICATED, OR COPIED FOR ANY PURPOSE, NOR MADE	Q.A.					=	1
AVAILABLE TO ANY THIRD PARTY WITHOUT THE PRIOR WRITTEN CONSENT OF A RFCI OFFICIAL."	PROG. MGMT/MKT		Α		SL3830-	05 1	
DO NOT SCALE DRAWING			SCAL	E: FULL		SHEET 1 OF 1	