


DWG. NO.

REV



RoHS 2002/95/EC	

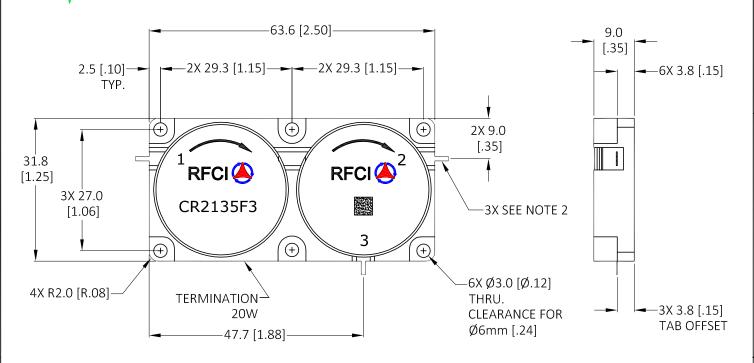

## **Specifications**

Parameter	Minimum	Typical	Maximum	
Frequency Range (MHz)		728		756
Insertion Loss (dB)	P1-P2 P2-P3		< .40 < .20	0.60 0.30
Isolation (dB)	P2-P1 P3-P2	45 22	> 55 > 25	
Return Loss (dB)		22	> 25	
FWD IMD: 2T at 37\ 5MHz Spacing		75		

## Power & Temperature Ratings

Maximum		
1000/200 Watts		
200 Watts		
-40 to +85° C		
-40 to +95° C		

## NOTES:

- 1. Typical Values Represent Mid-Band Performance @ +23 °C.
- 2. Tab Dims: 1.00[.039]Width x 3.0[.12]Length x .20[.008]Thick.

CW DUAL CIRCULATOR MODEL; CR2135F3

ALL DIMENSIONS ARE II	RWISE SPECIFIED N MILLIMETERS [INCHES]: NCES ARE:	THIRD ANGLE PROJECTION	<u></u> → ←	<del>  </del>						
1 PLACE DECIMAL ±.2 [±.01] 2 PLACE DECIMAL ±.10 [±.004]	ANGULAR: ±1.0° SURFACE ROUGHNESS <sup>16</sup>	APPROVA	LS	DATE		K	<b>-</b> (;			
	ND BREAK SHARP EDGES. DRDANCE WITH LATEST ANSI B46.1	DRAWN BY:	HV	04/19/13						
DIMENSIONING & TOLERANCING IN ACCORDANCE WITH LATEST ANSI Y14.5		CHECKED BY:	P.T	04/20/13						
PROPRIETARY NOTE: "THE INFORMATION CONTAINED ON THIS DOCUMENT IS CONSIDERED TO BE CONFIDENTIAL MATERIAL PROPRIETARY TO RF CIRCULATOR ISOLATOR INC. (RFC!) AND IS PROVIDED SOLELY FOR INFORMATION PURPOSES.  THIS INFORMATION SHALL NOT BE USED BY ANYONE OTHER THAN RFC! TO DESIGN OR CONSTRUCT ANY OF THE ITEMS DEPICTED, NOR SHALL IT BE DISCLOSED, DUPLICATED, OR COPIED FOR ANY PURPOSE, NOR MADE AVAILABLE TO ANY THIRD PARTY WITHOUT THE PRIOR WRITTEN CONSENT OF A RFC! OFFICIAL."		DESIGN BY:	P.T	04/01/13	OUTLINE/CDECC					
			P.T	04/01/13	OUTLINE/SPECS					
			L.T	4/21/13	SIZE CAGE NO. DWG NO. CR2135F3-OS			TREV.		
		Q.A.					000	1		
		PROG. MGMT/MKT			ζ		Unzi	SOF	5-03	1
DO NOT SCALE	DRAWING				SCALE	E: FULL			SHEET 1 OF 1	
		_					•			