
DWG. NO. CR2326F-OS SHT REV

THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY.

	REVISIONS				
REV.	DESCRIPTION	ECO	DATE	APPROVED	
1	INITIAL RELEASE	I.R.	04/22/13	P.T	



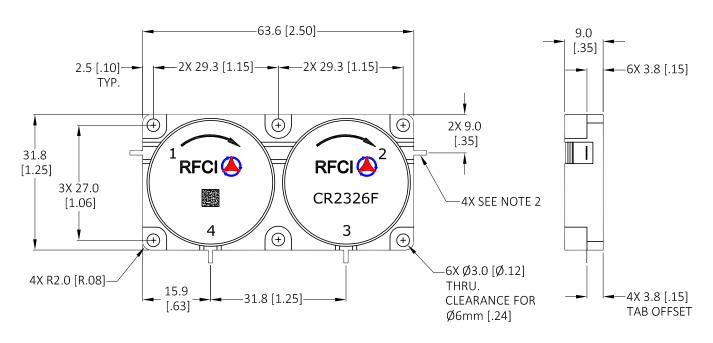

Specifications

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	1200		1400
Insertion Loss (dB)			
P1-P2; P3-P4		< .40	0.60
P2-P3; P4-P1		< .20	0.30
Isolation (dB)			
P2-P1; P4-P3	45	> 55	
P3-P2; P1-P4	22	> 25	
Return Loss (dB)	22	> 25	

Power & Temperature Ratings

Parameter	Maximum
Forward PWR Peak/AVG	1000/200 Watts
Reverse Power CW	200 Watts
Operating Temperature	-40 to +85° C
Storage Temperature	-40 to +95° C

NOTES:

- 1. Typical Values Represent Mid-Band Performance @ +23 °C.
- 2. Tab Dims: 1.00[.039]Width x 3.0[.12]Length x .20[.008]Thick.

CW DUAL CIRCULATOR MODEL: CR2326F

