


THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY. DO NOT REVISE MANUALLY.

| REVISIONS | | | |
|-----------|-----------------|------|----------|
| REV. | DESCRIPTION | ECO | DATE |
| 1 | INITIAL RELEASE | I.R. | 04/24/13 |

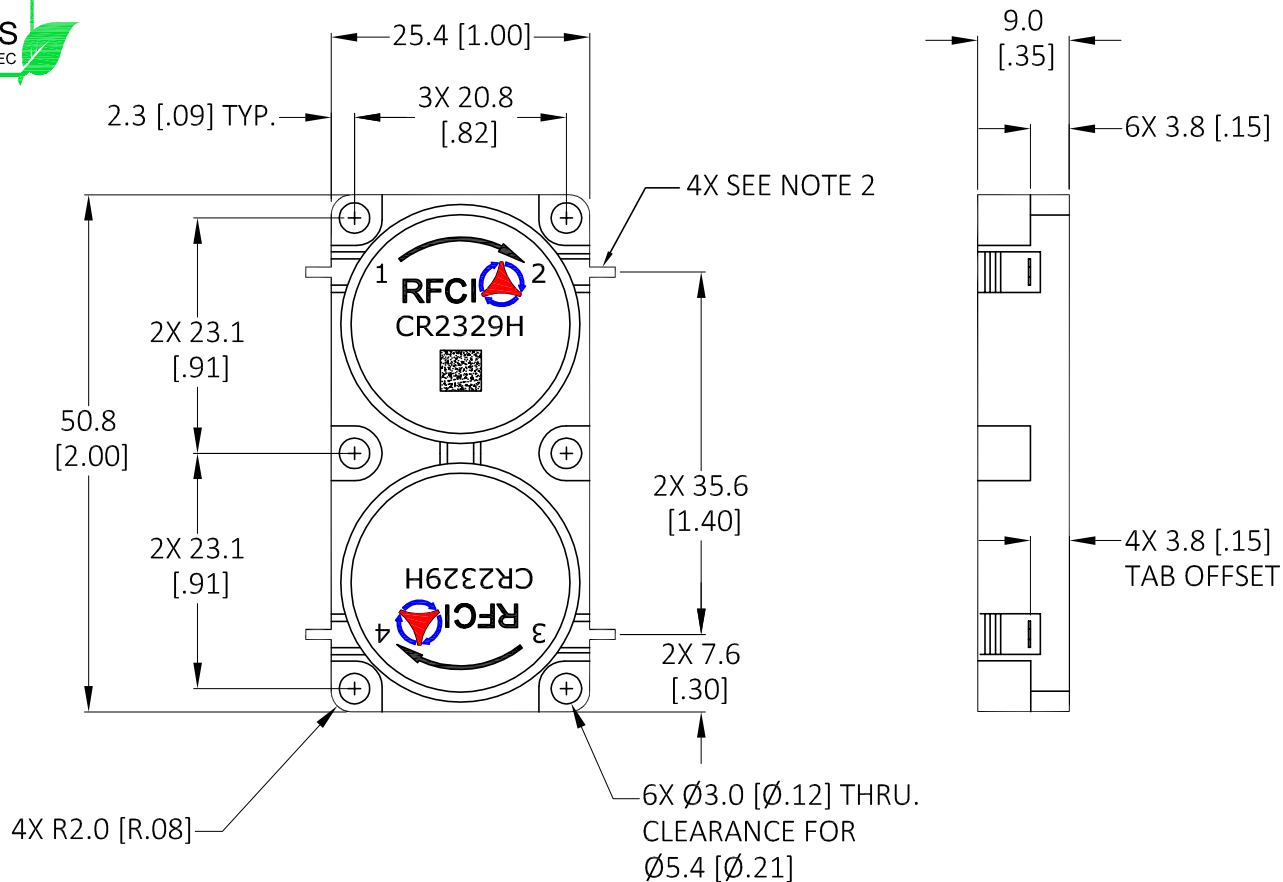

Specifications

| Parameter | Minimum | Typical | Maximum |
|--|---------|---------|---------|
| Frequency Range (MHz) | 900 | | 930 |
| Insertion Loss (dB) | | | |
| P1-P2; P3-P4 | | < .20 | 0.30 |
| P2-P3; P4-P1 | | < .40 | 0.60 |
| Isolation (dB) | | | |
| P2-P1; P4-P3 | 22 | > 25 | |
| P3-P2; P1-P4 | 45 | > 55 | |
| Return Loss (dB) | 22 | > 25 | |
| FWD IMD: 2T at 37W per T 5MHz Spacing (dBc) | | 75 | |

Power & Temperature Ratings

| Parameter | Maximum |
|-----------------------|----------------|
| Forward PWR Peak/AVG | 1000/200 Watts |
| Reverse Power CW | 200 Watts |
| Operating Temperature | -40 to +85° C |
| Storage Temperature | -40 to +95° C |

NOTES:

- Typical Values Represent Mid-Band Performance @ +23 °C.
- Tab Dims: 1.00[.039]Width x 2.5[.10]Length x .20[.008]Thick.

CW DUAL CIRCULATOR MODEL: CR2329H

| <p>UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS (INCHES):</p> <p>TOLERANCES ARE:</p> <table border="0"> <tr> <td>1 PLACE DECIMAL ±.2 [±.01]</td> <td>ANGULAR: ±1.0°</td> </tr> <tr> <td>2 PLACE DECIMAL ±.10 [±.004]</td> <td>SURFACE ROUGHNESS 16/</td> </tr> </table> <p>REMOVE ALL BURRS AND BREAK SHARP EDGES. SURFACE TEXTURE TO BE IN ACCORDANCE WITH LATEST ANSI B46.1 DIMENSIONING & TOLERANCING IN ACCORDANCE WITH LATEST ANSI Y14.5</p> <p>PROPRIETARY NOTE: "THE INFORMATION CONTAINED ON THIS DOCUMENT IS CONSIDERED TO BE CONFIDENTIAL MATERIAL PROPRIETARY TO RF CIRCULATOR ISOLATOR Inc. (RFCI) AND IS PROVIDED SOLELY FOR INFORMATION PURPOSES. THIS INFORMATION SHALL NOT BE USED BY ANYONE OTHER THAN RFCI TO DESIGN OR CONSTRUCT ANY OF THE ITEMS DEPICTED, NOR SHALL IT BE DISCLOSED, DUPLICATED, OR COPIED FOR ANY PURPOSE, NOR MADE AVAILABLE TO ANY THIRD PARTY WITHOUT THE PRIOR WRITTEN CONSENT OF A RFCI OFFICIAL."</p> | | 1 PLACE DECIMAL ±.2 [±.01] | ANGULAR: ±1.0° | 2 PLACE DECIMAL ±.10 [±.004] | SURFACE ROUGHNESS 16/ | <p>THIRD ANGLE PROJECTION</p> <table border="1"> <thead> <tr> <th>APPROVALS</th> <th>DATE</th> </tr> </thead> <tbody> <tr> <td>DRAWN BY: HV</td> <td>04/19/13</td> </tr> <tr> <td>CHECKED BY: P.T</td> <td>04/20/13</td> </tr> <tr> <td>DESIGN BY: P.T</td> <td>04/01/13</td> </tr> <tr> <td>ENGINEER BY: P.T</td> <td>04/01/13</td> </tr> <tr> <td>MFG. ENGR. L.T</td> <td>4/21/13</td> </tr> <tr> <td>Q.A.</td> <td></td> </tr> <tr> <td>PROG. MGMT/MKT</td> <td></td> </tr> </tbody> </table> | APPROVALS | DATE | DRAWN BY: HV | 04/19/13 | CHECKED BY: P.T | 04/20/13 | DESIGN BY: P.T | 04/01/13 | ENGINEER BY: P.T | 04/01/13 | MFG. ENGR. L.T | 4/21/13 | Q.A. | | PROG. MGMT/MKT | | <p>RFCI</p> <p>OUTLINE/SPECS</p> <table border="1"> <tr> <td>SIZE A</td> <td>CAGE NO.</td> <td>DWG NO. CR2329H-OS</td> <td>REV. 1</td> </tr> </table> | SIZE A | CAGE NO. | DWG NO. CR2329H-OS | REV. 1 |
|---|-----------------------|------------------------------|------------------|------------------------------|-----------------------|--|-----------|------|--------------|----------|-----------------|----------|----------------|----------|------------------|----------|----------------|---------|------|--|----------------|--|--|------------------|----------|------------------------------|------------------|
| 1 PLACE DECIMAL ±.2 [±.01] | ANGULAR: ±1.0° | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 PLACE DECIMAL ±.10 [±.004] | SURFACE ROUGHNESS 16/ | | | | | | | | | | | | | | | | | | | | | | | | | | |
| APPROVALS | DATE | | | | | | | | | | | | | | | | | | | | | | | | | | |
| DRAWN BY: HV | 04/19/13 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CHECKED BY: P.T | 04/20/13 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| DESIGN BY: P.T | 04/01/13 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ENGINEER BY: P.T | 04/01/13 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MFG. ENGR. L.T | 4/21/13 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Q.A. | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| PROG. MGMT/MKT | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| SIZE A | CAGE NO. | DWG NO. CR2329H-OS | REV. 1 | | | | | | | | | | | | | | | | | | | | | | | | |
| DO NOT SCALE DRAWING | | SCALE: FULL | SHEET 1 OF 1 | | | | | | | | | | | | | | | | | | | | | | | | |