


DWG. NO.

REV



THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL



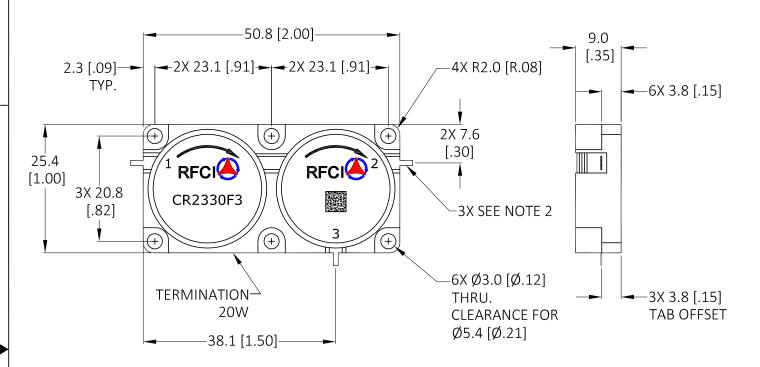

Specifications

Parameter		Minimum	Typical	Maximum	
Frequency Range (MHz)		920		960	
Insertion Loss (dB)	P1-P2 P2-P3		< .40 < .20	0.60 0.30	
Isolation (dB)	P2-P1 P3-P2	45 22	> 55 > 25		
Return Loss (dB)		22	> 25		
FWD IMD: 2T at 37W per T 5MHz Spacing (dBc)			75		

Power & Temperature Ratings

Maximum			
1000/200 Watts			
200 Watts			
-40 to +85° C			
-40 to +95° C			

NOTES:

- 1. Typical Values Represent Mid-Band Performance @ +23 °C.
- 2. Tab Dims: 1.00[.039]Width x 2.5[.10]Length x .20[.008]Thick.

CW DUAL CIRCULATOR MODEL: CR2330F3

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS (INCHES): TOLERANCES ARE:	THIRD ANGLE PROJECTION]						
1 PLACE DECIMAL ±.2 (±.01) 2 PLACE DECIMAL ±.10 (±.004) 3 SURFACE ROUGHNESS 16	APPROVALS	DATE	1	$\mathbb{R}^{ \mathcal{C} }$	-(;			
REMOVE ALL BURRS AND BREAK SHARP EDGES. SURFACE TEXTURE TO BE IN ACCORDANCE WITH LATEST ANSI B46.1	DRAWN BY: HV	04/19/13						
DIMENSIONING & TOLERANCING IN ACCORDANCE WITH LATEST ANSI Y14.5	CHECKED BY: P.T	04/20/13						
PROPRIETARY NOTE: "THE INFORMATION CONTAINED ON THIS DOCUMENT IS CONSIDERED TO BE CONFIDENTIAL MATERIAL PROPRIETARY TO RE	DESIGN BY: P.T	04/01/13		OUTLINE/SPECS				
CIRCULATOR ISOLATOR Inc. (RFCI) AND IS PROVIDED SOLELY FOR INFORMATION PURPOSES.	ENGINEER BY: P.T	04/01/13						
THIS INFORMATION SHALL NOT BE USED BY ANYONE OTHER THAN RFCI TO	MFG. ENGR.	4/21/13	SIZE	SIZE CAGE NO. DWG NO.				REV.
DESIGN OR CONSTRUCT ANY OF THE ITEMS DEPICTED, NOR SHALL IT BE DISCLOSED, DUPLICATED, OR COPIED FOR ANY PURPOSE, NOR MADE	Q.A.					2330F3-OS		4
AVAILABLE TO ANY THIRD PARTY WITHOUT THE PRIOR WRITTEN CONSENT OF A RFCI OFFICIAL."	PROG. MGMT/MKT		A		UR23	3UF3-	US	'
DO NOT SCALE DRAWING			SCALE: FULL				SHEET 1 OF 1	
	-	A				•		