


DWG. NO.

REV





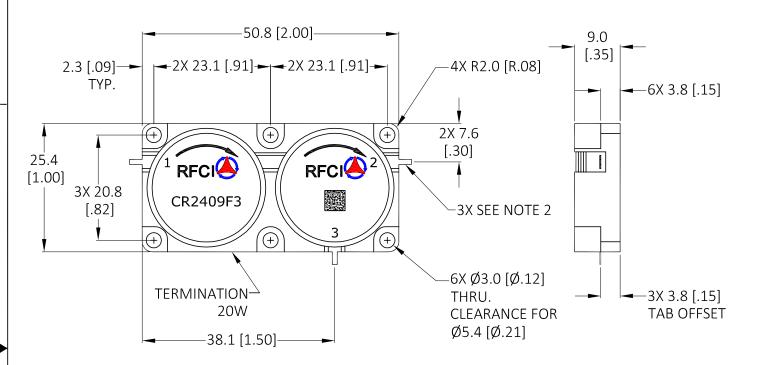

## **Specifications**

Parameter		Minimum	Typical	Maximum	
Frequency Range (MHz)		1700		2100	
Insertion Loss (dB)			< .50	0.70	
	P2-P3		< .30	0.40	
Isolation (dB)	P2-P1	40	> 48		
	P3-P2	20	> 23		
Return Loss (dB)		20	> 23		

## Power & Temperature Ratings

Parameter	Maximum		
Forward PWR Peak/AVG	1000/200 Watts		
Reverse Power CW	200 Watts		
Operating Temperature	-40 to +85° C		
Storage Temperature	-40 to +95° C		

- 1. Typical Values Represent Mid-Band Performance @ +23 °C.
- 2. Tab Dims: 1.00[.039]Width x 2.5[.10]Length x .20[.008]Thick.

CW DUAL CIRCULATOR MODEL: CR2409F3

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS [INCHES]: TOLERANCES ARE:	THIRD ANGLE PROJECTION	<del>]</del>						
1 PLACE DECIMAL ±.2 [±.01] ANGULAR: ±1.0° SURFACE ROUGHNESS 16/	APPROVALS	DATE		$\mathbb{R}$	<b>-(</b> ;			
REMOVE ALL BURRS AND BREAK SHARP EDGES. SURFACE TEXTURE TO BE IN ACCORDANCE WITH LATEST ANSI B46.1	DRAWN BY: HV	04/19/13						
DIMENSIONING & TOLERANCING IN ACCORDANCE WITH LATEST ANSI Y14.5	CHECKED BY: P.T	04/20/13						
PROPRIETARY NOTE: "THE INFORMATION CONTAINED ON THIS DOCUMENT IS CONSIDERED TO BE CONFIDENTIAL MATERIAL PROPRIETARY TO RE	DESIGN BY: P.T	04/01/13	OUTLINE/SPECS					
CIRCULATOR ISOLATOR Inc. (RFCI) AND IS PROVIDED SOLELY FOR INFORMATION PURPOSES.	ENGINEER BY: P.T	04/01/13						
THIS INFORMATION SHALL NOT BE USED BY ANYONE OTHER THAN RFCI TO DESIGN OR CONSTRUCT ANY OF THE ITEMS DEPICTED. NOR SHALL IT BE	MFG. ENGR. L.T	4/21/13	SIZE	CAGE NO.	DWG NO.		BI	REV.
DISCLOSED, DUPLICATED, OR COPIED FOR ANY PURPOSE, NOR MADE	Q.A.		Α .	OAGE NO.		00E0	1	
AVAILABLE TO ANY THIRD PARTY WITHOUT THE PRIOR WRITTEN CONSENT OF A RFCI OFFICIAL."	PROG. MGMT/MKT		A		UR24	09F3-OS		1
DO NOT SCALE DRAWING			SCALE: FULL			SHE	SHEET 1 OF 1	
		<b></b>						