


DWG. NO.

REV



RoHS 2002/95/EC	

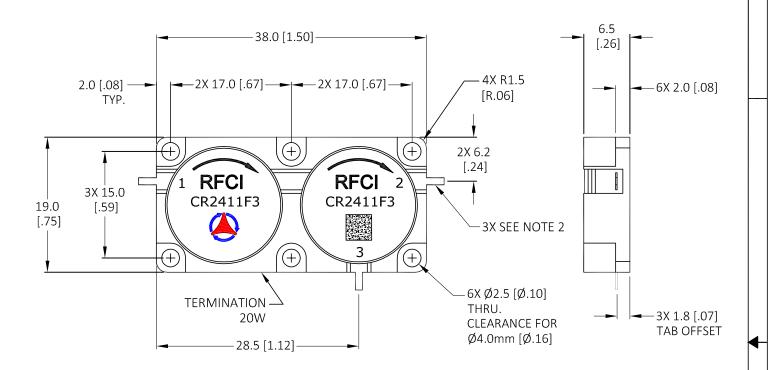

Specifications

Parameter		Minimum	Typical	Maximum
Frequency Range (MHz)		1600		1650
Insertion Loss (dB)	P1-P2 P2-P3		< .40 < .20	0.60 0.30
Isolation (dB)	P2-P1 P3-P2	45 22	> 55 > 25	
Return Loss (dB)		22	> 25	

Power & Temperature Ratings

Parameter	Maximum			
Forward PWR Peak/AVG	1000/100 Watts			
Reverse Power CW	100 Watts			
Operating Temperature	-40 to +85° C			
Storage Temperature	-40 to +95° C			
Storage Temperature	-40 to +95° C			

NOTES:

- 1. Typical Values Represent Mid-Band Performance @ +23 °C.
- 2. Tab Dims: 1.00[.039]Width x 2.5[.10]Length x .20[.008]Thick.

CW DUAL CIRCULATOR MODEL: CR2411F3

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS [INCHES]: TOLERANCES ARE:	THIRD ANGLE PROJECTION]						
1 PLACE DECIMAL ±.2 (±.01) 2 PLACE DECIMAL ±.10 (±.004) SURFACE ROUGHNESS 16	APPROVALS	DATE	1	$\mathbb{R}^{ \mathcal{C} }$	FCI			
REMOVE ALL BURRS AND BREAK SHARP EDGES. SURFACE TEXTURE TO BE IN ACCORDANCE WITH LATEST ANSI B46.1	DRAWN BY: HV	04/19/13					•	
DIMENSIONING & TOLERANCING IN ACCORDANCE WITH LATEST ANSI Y14.5	CHECKED BY: P.T	04/20/13						
PROPRIETARY NOTE: "THE INFORMATION CONTAINED ON THIS DOCUMENT IS CONSIDERED TO BE CONFIDENTIAL MATERIAL PROPRIETARY TO RE	DESIGN BY: P.T	04/01/13	OUTLINE/CDECC					
CIRCULATOR ISOLATOR Inc. (RFCI) AND IS PROVIDED SOLELY FOR INFORMATION PURPOSES.	ENGINEER BY: P.T	04/01/13	OUTLINE/SPECS					
THIS INFORMATION SHALL NOT BE USED BY ANYONE OTHER THAN RFCI TO DESIGN OR CONSTRUCT ANY OF THE ITEMS DEPICTED, NOR SHALL IT BE	MFG. ENGR. L.T	4/21/13	SIZE	CAGE NO.	DWG NO.			REV.
DISCLOSED, DUPLICATED, OR COPIED FOR ANY PURPOSE, NOR MADE AVAILABLE TO ANY THIRD PARTY WITHOUT THE PRIOR WRITTEN CONSENT	Q.A.		Α	orial No.		11F3-O	C	1
OF A RECI OFFICIAL."	PROG. MGMT/MKT		А		UN24	1153-0	<u> </u>	ı
DO NOT SCALE DRAWING			SCALE	E: FULL		SH	IEET 1 OF 1	
	-					•		