


DWG. NO.

REV



DO NOT REVISE MANUALLY.

ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY.

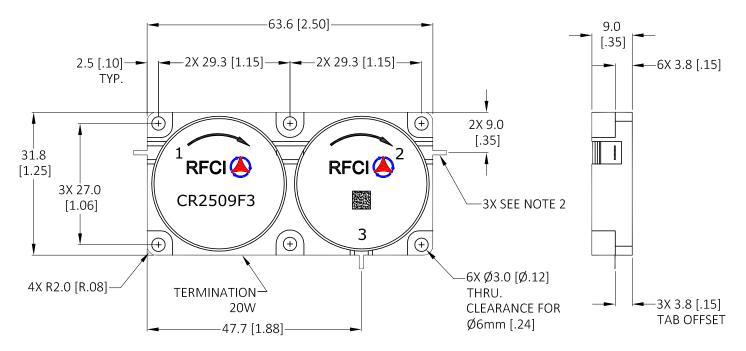

## **Specifications**

| Parameter             |                | Minimum  | Typical        | Maximum      |
|-----------------------|----------------|----------|----------------|--------------|
| Frequency Range (MHz) |                | 1700     |                | 2100         |
| Insertion Loss (dB)   | P1-P2<br>P2-P3 |          | < .50<br>< .30 | 0.70<br>0.40 |
| Isolation (dB)        | P2-P1<br>P3-P2 | 40<br>20 | > 48<br>> 23   |              |
| Return Loss (dB)      |                | 20       | > 23           |              |

## Power & Temperature Ratings

| Parameter             | Maximum        |  |
|-----------------------|----------------|--|
| Forward PWR Peak/AVG  | 1000/200 Watts |  |
| Reverse Power CW      | 200 Watts      |  |
| Operating Temperature | -40 to +85° C  |  |
| Storage Temperature   | -40 to +95° C  |  |

- 1. Typical Values Represent Mid-Band Performance @ +23 °C.
- 2. Tab Dims: 1.00[.039]Width x 3.0[.12]Length x .20[.008]Thick.

CW DUAL CIRCULATOR MODEL: CR2509F3

