DWG. NO.

CR2515F3-OS

REVISIONS


CR2515F3-OS

SHT REV
1 1

THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY.

| REVISIONS | | | | | |
|-----------|-----------------|------|----------|----------|--|
| REV. | DESCRIPTION | ECO | DATE | APPROVED | |
| 1 | INITIAL RELEASE | I.R. | 04/22/13 | P.T | |



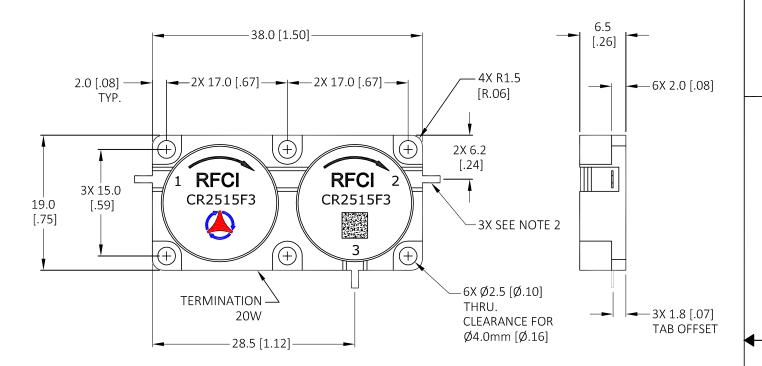

Specifications

| Parameter | | Minimum | Typical | Maximum |
|--|----------------|----------|----------------|--------------|
| Frequency Range (MHz) | | 1880 | | 1930 |
| Insertion Loss (dB) | P1-P2 P2-P3 | | < .40 < .20 | 0.60 0.30 |
| Isolation (dB) | P2-P1 P3-P2 | 45 22 | > 55 > 25 | |
| Return Loss (dB) | 22 | > 25 | | |
| FWD IMD: 2T at 37W per T 5MHz Spacing (dBc) | | | 75 | |

Power & Temperature Ratings

| Parameter | Maximum | | |
|-----------------------|----------------|--|--|
| Forward PWR Peak/AVG | 1000/100 Watts | | |
| Reverse Power CW | 100 Watts | | |
| Operating Temperature | -40 to +85° C | | |
| Storage Temperature | -40 to +95° C | | |

NOTES:

- 1. Typical Values Represent Mid-Band Performance @ +23 °C.
- 2. Tab Dims: 1.00[.039]Width x 2.5[.10]Length x .20[.008]Thick.

CW DUAL CIRCULATOR MODEL; CR2515F3

| UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS (INCHES): TOLERANCES ARE: | THIRD ANGLE PROJECTION | | | | | | | |
|--|------------------------|----------|-----------------------|-----|------------|------|------------|---|
| 1 PLACE DECIMAL ±.2 (±.01) 2 PLACE DECIMAL ±.10 (±.004) ANGULAR: ±1.0° SURFACE ROUGHNESS 16 | APPROVALS | DATE | | K | | | | |
| REMOVE ALL BURRS AND BREAK SHARP EDGES. SURFACE TEXTURE TO BE IN ACCORDANCE WITH LATEST ANSI B46.1 | DRAWN BY: HV | 04/19/13 | | 1 2 | | | | |
| DIMENSIONING & TOLERANCING IN ACCORDANCE WITH LATEST ANSI Y14.5 | CHECKED BY: P.T | 04/20/13 | | | | | | |
| PROPRIETARY NOTE: "THE INFORMATION CONTAINED ON THIS DOCUMENT IS CONSIDERED TO BE CONFIDENTIAL MATERIAL PROPRIETARY TO RE | DESIGN BY: P.T | 04/01/13 | | | | | | |
| CIRCULATOR ISOLATOR Inc. (RFCI) AND IS PROVIDED SOLELY FOR INFORMATION PURPOSES. | ENGINEER BY: P.T | 04/01/13 | OUTLINE/SPECS | | | | | |
| THIS INFORMATION SHALL NOT BE USED BY ANYONE OTHER THAN RFCI TO DESIGN OR CONSTRUCT ANY OF THE ITEMS DEPICTED. NOR SHALL IT BE | MFG. ENGR. | 4/21/13 | SIZE CAGE NO. DWG NO. | | | REV. | | |
| DISCLOSED, DUPLICATED, OR COPIED FOR ANY PURPOSE, NOR MADE | Q.A. | | | | | 2 | 1 | |
| AVAILABLE TO ANY THIRD PARTY WITHOUT THE PRIOR WRITTEN CONSENT OF A RFCI OFFICIAL." | PROG. MGMT/MKT | | A | | UR2515F3-0 | | > | · |
| DO NOT SCALE DRAWING | | | SCALE: FULL | | | SHE | EET 1 OF 1 | |
| | | | | | | | | |