


DWG. NO.

REV





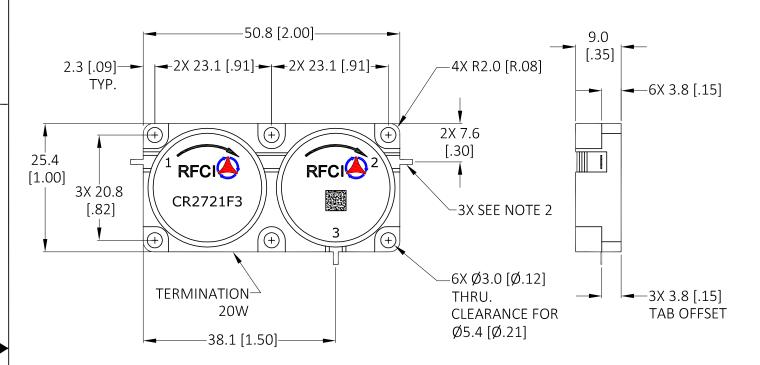

Specifications

Parameter	Minimum	Typical	Maximum	
Frequency Range (M	2010		2300	
Insertion Loss (dB)	P1-P2 P2-P3		< .45 < .20	0.60 0.35
Isolation (dB)	P2-P1 P3-P2	45 22	> 55 > 25	
Return Loss (dB)		22	> 25	

Power & Temperature Ratings

Parameter	Maximum			
Forward PWR Peak/AVG	1000/200 Watts			
Reverse Power CW	200 Watts			
Operating Temperature	-40 to +85° C			
Storage Temperature	-40 to +95° C			

- 1. Typical Values Represent Mid-Band Performance @ +23 °C.
- 2. Tab Dims: 1.00[.039]Width x 2.5[.10]Length x .20[.008]Thick.

CW DUAL CIRCULATOR MODEL: CR2721F3

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS (INCHES): TOLERANCES ARE:		THIRD ANGLE PROJE	RD ANGLE PROJECTION							
1 PLACE DECIMAL ±.2 [±.01] 2 PLACE DECIMAL ±.10 [±.004]	ANGULAR: ±1.0° SURFACE ROUGHNESS 16	APPRO\	/ALS	DATE		R	H (;			
REMOVE ALL BURRS AND BREAK SHARP EDGES. SURFACE TEXTURE TO BE IN ACCORDANCE WITH LATEST ANSI B46.1 DIMENSIONING & TOLERANCING IN ACCORDANCE WITH LATEST ANSI Y14.5		DRAWN BY:	HV	04/19/13						
		CHECKED BY:	P.T	04/20/13						
PROPRIETARY NOTE: "THE INFORMATION CONTAINED ON THIS DOCUMENT IS CONSIDERED TO BE CONFIDENTIAL MATERIAL PROPRIETARY TO RF CIRCULATOR ISOLATOR INC. (RFCI) AND IS PROVIDED SOLELY FOR INFORMATION PURPOSES. THIS INFORMATION SHALL NOT BE USED BY ANYONE OTHER THAN RFCI TO DESIGN OR CONSTRUCT ANY OF THE ITEMS DEPICTED, NOR SHALL IT BE DISCLOSED, DUPLICATED, OR COPIED FOR ANY PURPOSE, NOR MADE AVAILABLE TO ANY THIRD PARTY WITHOUT THE PRIOR WRITTEN CONSENT OF A RFCI OFFICIAL."		DESIGN BY:	P.T	04/01/13	OUTLINE/SPECS					
		ENGINEER BY:	P.T	04/01/13						
		MFG. ENGR.	L.T	4/21/13	SIZE	CAGE NO.	DWG NO.			REV.
		Q.A.			A 0.00704.50		000	1		
		PROG. MGMT/MKT			А		UN2/	2153	5-05	•
DO NOT SCALE	DRAWING				SCAL	E: FULL			SHEET 1 OF 1	
		-		A				•		