
DWG. NO. CR2851F3-OS SHT REV 1 1 1

THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY. DO NOT REVISE MANUALLY.

	REVISIONS			
REV.	DESCRIPTION	ECO	DATE	APPROVED
1	INITIAL RELEASE	I.R.	04/22/13	P.T



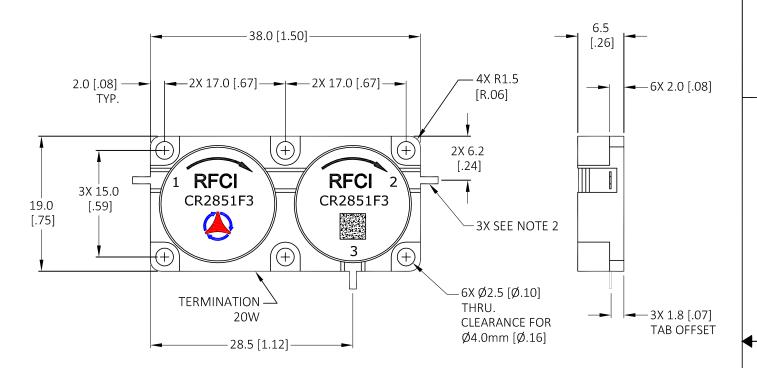

## Specifications

Parameter		Minimum	Typical	Maximum
Frequency Range (MHz)		2470		2730
Insertion Loss (dB)	P1-P2 P2-P3		< .40 < .20	0.60 0.30
Isolation (dB)	P2-P1 P3-P2	45 22	> 55 > 25	
Return Loss (dB)		22	> 25	
FWD IMD: 2T at 37W per T 5MHz Spacing (dBc)			75	

## Power & Temperature Ratings

Parameter	Maximum		
Forward PWR Peak/AVG	1000/100 Watts		
Reverse Power CW	100 Watts		
Operating Temperature	-40 to +85° C		
Storage Temperature	-40 to +95° C		

## NOTES:

- 1. Typical Values Represent Mid-Band Performance @ +23 °C.
- 2. Tab Dims: 1.00[.039]Width x 2.5[.10]Length x .20[.008]Thick.

CW DUAL CIRCULATOR MODEL; CR2851F3

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS [INCHES]: TOLERANCES ARE:	THIRD ANGLE PROJECTION						
1 PLACE DECIMAL ±.2 [±.01] ANGULAR: ±1.0° SURFACE ROUGHNESS 16/	APPROVALS	DATE	l	R			
REMOVE ALL BURRS AND BREAK SHARP EDGES. SURFACE TEXTURE TO BE IN ACCORDANCE WITH LATEST ANSI B46.1	DRAWN BY: HV	04/19/13		1 7			
DIMENSIONING & TOLERANCING IN ACCORDANCE WITH LATEST ANSI Y14.5	CHECKED BY: P.T	04/20/13					
PROPRIETARY NOTE: "THE INFORMATION CONTAINED ON THIS DOCUMENT IS CONSIDERED TO BE CONFIDENTIAL MATERIAL PROPRIETARY TO RE	DESIGN BY: P.T	04/01/13					
CIRCULATOR ISOLATOR Inc. (RFCI) AND IS PROVIDED SOLELY FOR INFORMATION PURPOSES.	ENGINEER BY: P.T	04/01/13	OUTLINE/SPECS				
THIS INFORMATION SHALL NOT BE USED BY ANYONE OTHER THAN RFCI TO DESIGN OR CONSTRUCT ANY OF THE ITEMS DEPICTED. NOR SHALL IT BE	MFG. ENGR. L.T	4/21/13	SIZE	CAGE NO.	DWG NO.		REV.
DISCLOSED, DUPLICATED, OR COPIED FOR ANY PURPOSE, NOR MADE	Q.A.			orial no.		51F3-OS	1
AVAILABLE TO ANY THIRD PARTY WITHOUT THE PRIOR WRITTEN CONSENT OF A RFCI OFFICIAL."	PROG. MGMT/MKT		Α		Un20:	3173-03	<u>'</u>
DO NOT SCALE DRAWING			SCALE: FULL			SHEET 1	OF 1
						•	