
DWG. NO. CR2879H-OS SHT REV

THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY. DO NOT REVISE MANUALLY.

	REVISIONS					
REV.	REV. DESCRIPTION		DATE	APPROVED		
1	INITIAL RELEASE	I.R.	04/24/13	P.T		



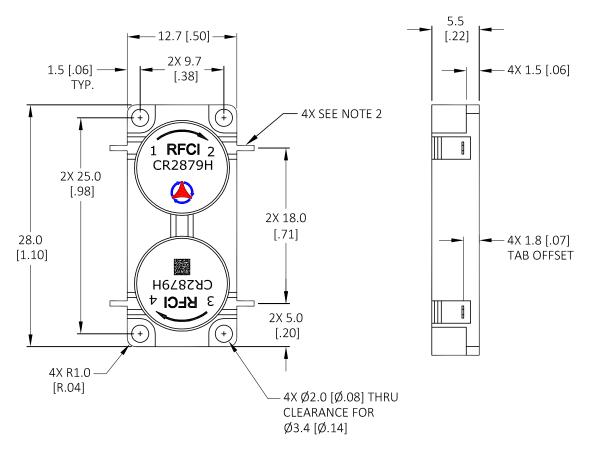

## Specifications

Parameter	Minimum	Typical	Maximum	
Frequency Range (MHz)	5400		5900	
Insertion Loss (dB)				
P1-P2; P3-P4		< .30	0.35	
P2-P3; P4-P1		< .50	0.60	
Isolation (dB)				
P2-P1; P4-P3	20	> 22		
P3-P2; P1-P4	40	> 48		
Return Loss (dB)	20	> 22		

## Power & Temperature Ratings

Parameter	Maximum
Forward PWR Peak/AVG	500/35 Watts
Reverse Power CW	35 Watts
Operating Temperature	-40 to +85° C
Storage Temperature	-40 to +95° C

## NOTES:

- 1. Typical Values Represent Mid-Band Performance @ +23 °C.
- 2. Tab Dims: .62[.024]Width x 2.0[.08]Length x .20[.008]Thick.

CW DUAL CIRCULATOR MODEL: CR2879H

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS (INCHES): TOLERANCES ARE:	THIRD ANGLE PROJECTION	THIRD ANGLE PROJECTION						
1 PLACE DECIMAL ±.2 [±.01] ANGULAR: ±1.0° SURFACE ROUGHNESS 16/	APPROVALS	DATE	RF()					
REMOVE ALL BURRS AND BREAK SHARP EDGES. SURFACE TEXTURE TO BE IN ACCORDANCE WITH LATEST ANSI B46.1	DRAWN BY: HV	04/19/13						
DIMENSIONING & TOLERANCING IN ACCORDANCE WITH LATEST ANSI Y14.5	CHECKED BY: P.T	04/20/13						
PROPRIETARY NOTE: "THE INFORMATION CONTAINED ON THIS DOCUMENT IS CONSIDERED TO BE CONFIDENTIAL MATERIAL PROPRIETARY TO RE	DESIGN BY: P.T	04/01/13						
CIRCULATOR ISOLATOR Inc. (RFCI) AND IS PROVIDED SOLELY FOR INFORMATION PURPOSES.	ENGINEER BY: P.T	04/01/13	OUTLINE/SPECS					
THIS INFORMATION SHALL NOT BE USED BY ANYONE OTHER THAN RFCI TO	MFG. ENGR.	4/21/13	SIZE	CAGE NO.	DWG NO.			REV.
DESIGN OR CONSTRUCT ANY OF THE ITEMS DEPICTED, NOR SHALL IT BE DISCLOSED, DUPLICATED, OR COPIED FOR ANY PURPOSE, NOR MADE	Q.A.		5.22   5.152.151		1 00	1		
AVAILABLE TO ANY THIRD PARTY WITHOUT THE PRIOR WRITTEN CONSENT OF A RFCI OFFICIAL."	PROG. MGMT/MKT		A		CR2879H-OS			
DO NOT SCALE DRAWING	·		SCAL	E: FULL			SHEET 1 OF 1	