
DWG. NO. CR2880H-OS SHT REV

THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY. DO NOT REVISE MANUALLY.

	REVISIONS			
REV.	DESCRIPTION	ECO	DATE	APPROVED
1	INITIAL RELEASE	I.R.	04/24/13	P.T



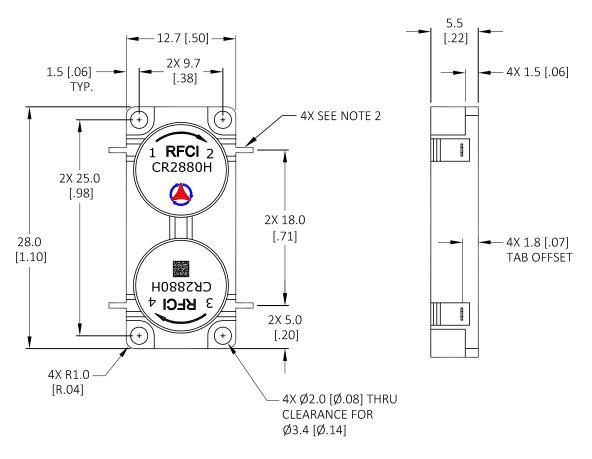

## **Specifications**

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	5800		6700
Insertion Loss (dB)			
P1-P2; P3-P4		< .35	0.40
P2-P3; P4-P1		< .60	0.70
Isolation (dB)			
P2-P1; P4-P3	20	> 22	
P3-P2; P1-P4	40	> 48	
Return Loss (dB)	20	> 22	

## Power & Temperature Ratings

Parameter	Maximum		
Forward PWR Peak/AVG	500/35 Watts		
Reverse Power CW	35 Watts		
Operating Temperature	-40 to +85° C		
Storage Temperature	-40 to +95° C		

## NOTES:

- 1. Typical Values Represent Mid-Band Performance @ +23 °C.
- 2. Tab Dims: .62[.024]Width x 2.0[.08]Length x .20[.008]Thick.

CW DUAL CIRCULATOR MODEL: CR2880H

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS (INCHES): TOLERANCES ARE:	THIRD ANGLE PROJECTION							
1 PLACE DECIMAL ±.2 [±.01] ANGULAR: ±1.0° 2 PLACE DECIMAL ±.10 [±.004] SURFACE ROUGHNESS 16/	APPROVALS	DATE	l	R				
REMOVE ALL BURRS AND BREAK SHARP EDGES. SURFACE TEXTURE TO BE IN ACCORDANCE WITH LATEST ANSI B46.1	DRAWN BY: HV	04/19/13						
DIMENSIONING & TOLERANCING IN ACCORDANCE WITH LATEST ANSI Y14.5	CHECKED BY: P.T	04/20/13						
PROPRIETARY NOTE: "THE INFORMATION CONTAINED ON THIS DOCUMENT IS CONSIDERED TO BE CONFIDENTIAL MATERIAL PROPRIETARY TO RE	DESIGN BY: P.T	04/01/13	OUTLINE/SPECS					
CIRCULATOR ISOLATOR Inc. (RFCI) AND IS PROVIDED SOLELY FOR INFORMATION PURPOSES.	ENGINEER BY: P.T	04/01/13						
THIS INFORMATION SHALL NOT BE USED BY ANYONE OTHER THAN RFCI TO	MFG. ENGR. L.T	4/21/13	SIZE	CAGE NO.	DWG NO.			TREV.
DESIGN OR CONSTRUCT ANY OF THE ITEMS DEPICTED, NOR SHALL IT BE DISCLOSED, DUPLICATED, OR COPIED FOR ANY PURPOSE, NOR MADE	Q.A.		0.000011.00			1 1		
AVAILABLE TO ANY THIRD PARTY WITHOUT THE PRIOR WRITTEN CONSENT OF A RFCI OFFICIAL."	PROG. MGMT/MKT		Α		UR28	BOUH	1-05	'
DO NOT SCALE DRAWING			SCAL	E: FULL			SHEET 1 OF 1	