




ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY.

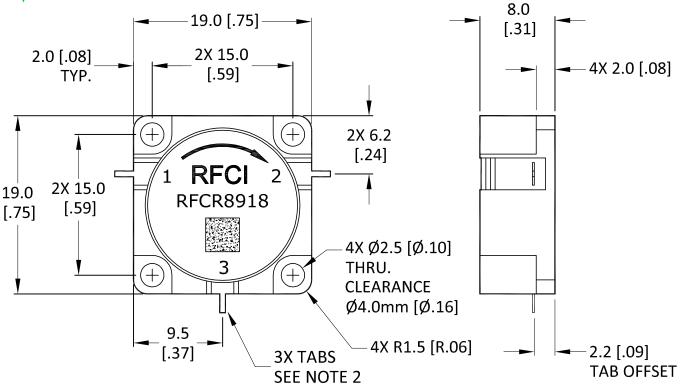

## **Specifications**

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	4500		9000
Insertion Loss (dB)		< .50	.60
Isolation (dB)	17	> 20	
Return Loss (dB)	17	> 20	

## Power & Temperature Ratings

Parameter	Maximum
Forward PWR Peak/AVG	250/30 Watts
Reverse Power CW	20 Watts
Operating Temperature	-40 to +85° C
Storage Temperature	-40 to +95° C

## Notes:

- 1. Typical Values Represent Mid-Band Performance @ +23 °C.
- 2. Tab dimensions: .62[0.24]Width x 2.0[.08]Length x .20[.008]Thick

## CW OCTAVE CIRCULATOR MODEL: RFCR8918

