DWG. NO. REV CR3806F-0S REVISIONS

ECO

I.R.

DATE


04/22/13

APPROVED

P.T

	ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY.
	DO NOT REVISE MANUALLY.
1	



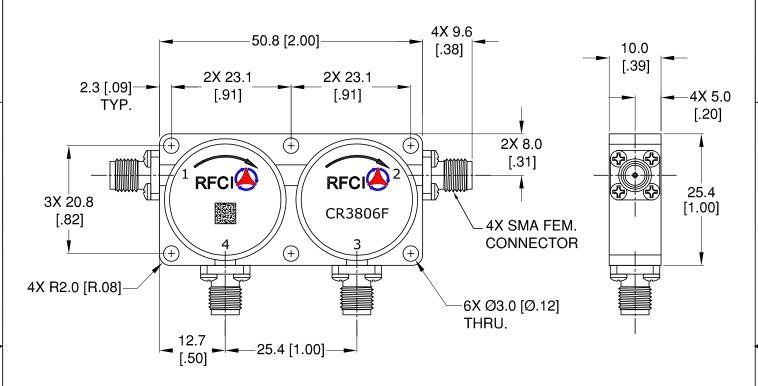

INITIAL RELEASE

DESCRIPTION

## **Specifications**

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	2200		2400
Insertion Loss (dB)			
P1-P2; P3-P4		< .50	0.60
P2-P3; P4-P1		< .30	0.35
Isolation (dB)			
P2-P1; P4-P3	46	> 52	
P3-P2; P1-P4	22	> 25	
Return Loss (dB)	22	> 25	

## Power & Temperature Ratings

Parameter	Maximum
Forward PWR Peak/AVG	1000/200 Watts
Reverse Power CW	200 Watts
Operating Temperature	-40 to +85° C
Storage Temperature	-40 to +95° C

Notes: Typical Values Represent Mid-Band Performance @ +23 °C.

## CW SMAf DUAL CIRCULATOR MODEL CR3806F

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS (INCHES): TOLERANCES ARE:	THIRD ANGLE PROJECTION		DECL (A)				
1 PLACE DECIMAL ±.2 [±.01] ANGULAR: ±1.0° 2 PLACE DECIMAL ±.10 [±.004] SURFACE ROUGHNESS 16/	APPROVALS	DATE			TVI 🦞		
REMOVE ALL BURRS AND BREAK SHARP EDGES. SURFACE TEXTURE TO BE IN ACCORDANCE WITH LATEST ANSI B46.1	DRAWN BY:				<u> </u>		
DIMENSIONING & TOLERANCING IN ACCORDANCE WITH LATEST ANSI \$46.1	CHECKED BY:		TITLE				
PROPRIETARY NOTE: "THE INFORMATION CONTAINED ON THIS DOCUMENT IS CONSIDERED TO BE CONFIDENTIAL MATERIAL PROPRIETARY TO RE	DESIGN BY:		OUTLINE/SPECS				
CIRCULATOR ISOLATOR Inc. (RFCI) AND IS PROVIDED SOLELY FOR INFORMATION PURPOSES.	ENGINEER BY:		OUTLINE/OF LOO				
THIS INFORMATION SHALL NOT BE USED BY ANYONE OTHER THAN RFCI TO	MFG. ENGR.		SIZE	SIZE CAGE NO. DWG NO.			REV.
DESIGN OR CONSTRUCT ANY OF THE ITEMS DEPICTED, NOR SHALL IT BE DISCLOSED, DUPLICATED, OR COPIED FOR ANY PURPOSE, NOR MADE	Q.A.						4
AVAILABLE TO ANY THIRD PARTY WITHOUT THE PRIOR WRITTEN CONSENT OF A RFCI OFFICIAL."	PROG. MGMT/MKT		Α	A	CR3806F	306F-OS	
DO NOT SCALE DRAWING			SCALE: FULL			SHEET 1 OF 1	