
DWG. NO.
 SL2137-OS
 SHT
 REV

 1
 1

THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY.

REVISIONS							
REV.	DESCRIPTION	ECO	DATE	APPROVED			
1	INITIAL RELEASE	I.R.	04/20/13	P.T			



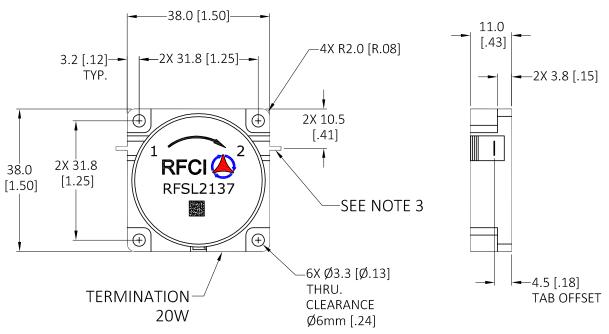

Specifications

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	450		500
Insertion Loss (dB)		< .30	.40
Isolation (dB)	20	> 23	
Return Loss (dB)	20	> 23	

Notes:

- 1. Typical Values Represent Mid-Band Performance @ +23 °C.
- 2. Isolator Flange held to +85°C; 30 Min. maximum Duration.
- 3. Tab dims: 1.00[.039]Width x 3.0[.12]Length x .20[.008]Thick

Power & Temperature Ratings

Parameter	Maximum			
Forward PWR Peak/AVG	1000/200 Watts			
Reverse Power CW	20 Watts			
Termination Rating (See Note 2.)	20 Watts			
Operating Temperature	-20 to +85° C			
Storage Temperature	-40 to +95° C			

CW 20W ISOLATOR MODEL: RFSL2137

UNLESS OTHERWISE ALL DIMENSIONS ARE IN MILLIME TOLERANCES ARE	THIRD ANGLE PROJECTION						1			
	ULAR: ±1.0° FACE ROUGHNESS ¹⁶ √	APPRO'	VALS	DATE	1 RFCI					
REMOVE ALL BURRS AND BREAK SHARP EDGES. SURFACE TEXTURE TO BE IN ACCORDANCE WITH LATEST ANSI B46.1 DIMENSIONING & TOLERANCING IN ACCORDANCE WITH LATEST ANSI Y14.5		DRAWN BY:	HV	04/17/13						
		CHECKED BY:	P.T	04/18/13						
PROPRIETARY NOTE: "THE INFORMATION CONTAINED ON THIS DOCUMENT IS CONSIDERED TO BE CONFIDENTIAL MATERIAL PROPRIETARY TO RECIRCULATOR ISOLATOR Inc. (RFCI) AND IS PROVIDED SOLELY FOR INFORMATION PURPOSES. THIS INFORMATION SHALL NOT BE USED BY ANYONE OTHER THAN RFCI TO DESIGN OR CONSTRUCT ANY OF THE ITEMS DEPICTED, NOR SHALL IT BE DISCLOSED, DUPLICATED, OR COPIED FOR ANY PURPOSE, NOR MADE AVAILABLE TO ANY THIRD PARTY WITHOUT THE PRIOR WRITTEN CONSENT OF A RFCI OFFICIAL."		DESIGN BY:	P.T	12/12/12	OUTLINE/SPECS					
		ENGINEER BY:	P.T	12/12/12						
		MFG. ENGR.	L.T	04/20/13	SIZE	CAGE NO.	DWG NO.			REV.
		Q.A. PROG. MGMT/MKT			A			137-	OS	1
DO NOT SCALE DRAW	WING			SCALE: FULL				SHEET 1 OF 1		