




DWG. NO.

REV

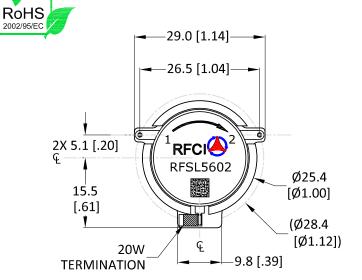

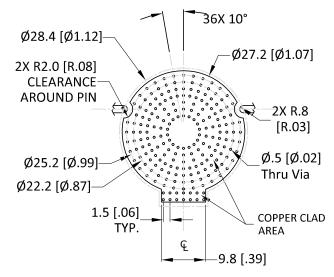

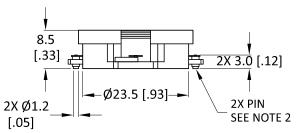

Recommended Footprint

Specifications

ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY.

| Parameter | Minimum | Typical | Maximum |
|------------------------------------------------|---------|---------|---------|
| Frequency Range (MHz) | 1930 | | 1995 |
| Insertion Loss (dB) | | < .22 | .30 |
| Isolation (dB) | 20 | > 23 | |
| Return Loss (dB) | 20 | > 23 | |
| FWD IMD: 2T at 37W per T 5MHz Spacing (dBc) | | 75 | |

Notes:

- 1. Typical Values Represent Mid-Band Performance @ +23 °C.
- 2. Coplanarity specification: .10 [.004] Max.
- 3. Isolator Flange held to +85°C; 30 Min. maximum Duration.

Power & Temperature Ratings

| Parameter | Maximum | |
|---------------------------------|----------------|--|
| Forward PWR Peak/AVG | 500/200 Watts | |
| Reverse Power CW | 20 Watts | |
| Termination Rating (See Note 3) | 20 Watts | |
| Operating Temperature | -40 to +85° C | |
| Storage Temperature | -50 to +125° C | |

1. Housing: Silver plated 2. Pin: Gold plated

CW SMD ISOLATOR MODEL: RFSL5602

