




ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY.

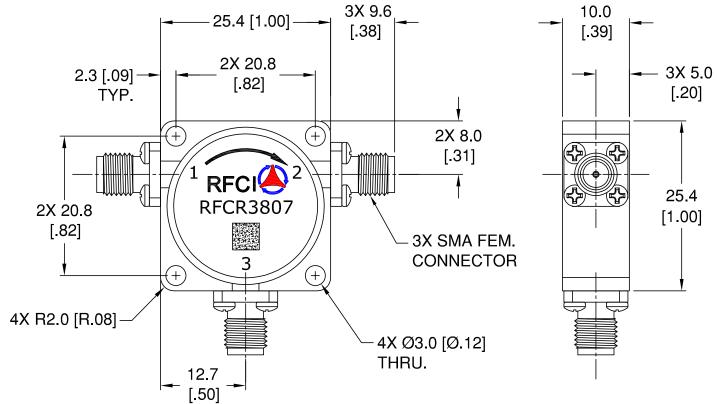

Specifications

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	2300		2680
Insertion Loss (dB)		< .35	.45
Isolation (dB)	22	> 25	
Return Loss (dB)	22	> 25	

Power & Temperature Ratings

Parameter	Maximum	
Forward PWR Peak/AVG	1000/200 Watts	
Reverse Power CW	200 Watts	
Operating Temperature	-40 to +85° C	
Storage Temperature	-40 to +95° C	

Notes: Typical Values Represent Mid-Band Performance @ +23 °C.

CW SMAf CIRCULATOR MODEL RFCR3807

