


DWG. NO.

REV



ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY.

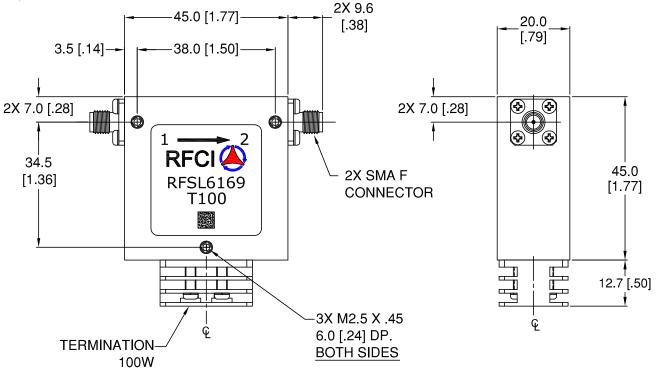

Specifications

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	700		1000
Insertion Loss (dB)		< .50	.60
Isolation (dB)	17	> 19	
Return Loss (dB)	17	> 19	

- 1. Typical Values Represent Mid-Band Performance @ +23 °C.
- 2. Isolator held to +85°C; 30 Min. maximum Duration.

Power & Temperature Ratings

Parameter	Maximum	
Forward PWR Peak/AVG	2.5K/250 Watts	
Reverse Power CW	100 Watts	
Termination Rating (See note 2)	100 Watts	
Operating Temperature	-20 to +85° C	
Storage Temperature	-40 to +95° C	

SMAf 100W ISOLATOR MODEL: RFSL6169-T100

