
DWG. NO. SL2716-A30-OS SHT REV

THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY.

	REVISIONS						
R	REV.	DESCRIPTION	ECO	DATE	APPROVED		
	Α	INITIAL RELEASE	I.R.	10/12/14	P.T		



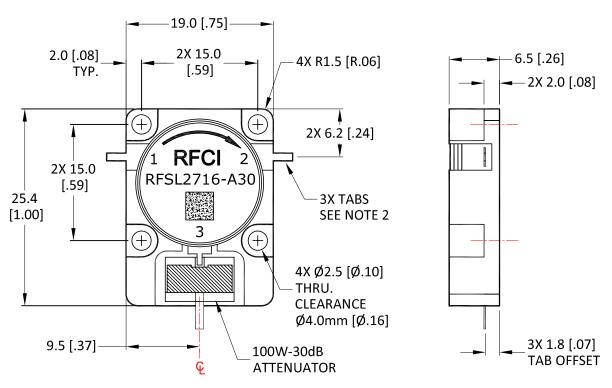

## **Specifications**

Parameter	Minimum	Typical	Maximum	
Frequency Range (MHz)	2000		2300	
Insertion Loss (dB)		< .30	.50	
Isolation (dB)	20	> 23		
Return Loss (dB)	20	> 23		

## Notes:

- 1. Typical Values Represent Performance @ +23 °C.
- 2. Tab Dimensions: 1.00 [.040]W x 3.0[.12]L x 0.20[.008]T
- 3. Iso-Attenuator Flange held to +85°C; 30 Minute Maximum Duration

## Power & Temperature Ratings

Parameter	Maximum		
Forward PWR Peak/AVG	1000/100 Watts		
Reverse Power CW	100 Watts		
Termination Rating (See Note 3)	100 Watts		
Attenuation (P3)	30dB± 1dB		
Operating Temperature	-40 to +85° C		
Storage Temperature	-40 to +95° C		

CW 100W-30dB ISO-ATTENUATOR MODEL: RFSL2716-A30

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS (INCHES): TOLERANCES ARE:	THIRD ANGLE PROJECTION		DECL (A)				
1 PLACE DECIMAL ±.2 [±.01] ANGULAR: ±1.0° SURFACE ROUGHNESS 16/	APPROVALS	DATE					
REMOVE ALL BURRS AND BREAK SHARP EDGES. SURFACE TEXTURE TO BE IN ACCORDANCE WITH LATEST ANSI B46.1	DRAWN BY:						
DIMENSIONING & TOLERANCING IN ACCORDANCE WITH LATEST ANSI Y14.5	CHECKED BY:		TITLE				
PROPRIETARY NOTE: "THE INFORMATION CONTAINED ON THIS DOCUMENT IS CONSIDERED TO BE CONFIDENTIAL MATERIAL PROPRIETARY TO RE	DESIGN BY:		OUTLINE/SPECS				
CIRCULATOR ISOLATOR Inc. (RFCI) AND IS PROVIDED SOLELY FOR INFORMATION PURPOSES.	ENGINEER BY:						
THIS INFORMATION SHALL NOT BE USED BY ANYONE OTHER THAN RFCI TO DESIGN OR CONSTRUCT ANY OF THE ITEMS DEPICTED, NOR SHALL IT BE	MFG. ENGR.					IREV.	
DISCLOSED, DUPLICATED, OR COPIED FOR ANY PURPOSE, NOR MADE	Q.A.						A
AVAILABLE TO ANY THIRD PARTY WITHOUT THE PRIOR WRITTEN CONSENT OF A RFCI OFFICIAL."	PROG. MGMT/MKT		Α		SL2716-A30-OS		
DO NOT SCALE DRAWING				E: FULL		SHEET 1 OF 1	·