
DWG. NO. REV SL2817-A30-OS

THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY. DO NOT REVISE MANUALLY.

REVISIONS							
REV.	DESCRIPTION	ECO	DATE	APPROVED			
Α	INITIAL RELEASE	I.R.	10/12/14	P.T			



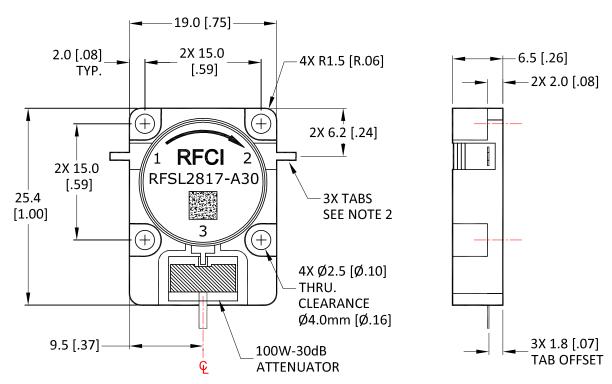

Specifications

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	2700		3300
Insertion Loss (dB)		< .30	.40
Isolation (dB)	20	> 23	
Return Loss (dB)	20	> 23	

- 1. Typical Values Represent Performance @ +23 °C.
 2. Tab Dimensions: 1.00 [.040]W x 3.0[.12]L x 0.20[.008]T
 3. Iso-Attenuator Flange held to +85°C; 30 Minute Maximum Duration

Power & Temperature Ratings

Parameter	Maximum	
Forward PWR Peak/AVG	1000/100 Watts	
Reverse Power CW	100 Watts	
Termination Rating (See Note 3)	100 Watts	
Attenuation (P3)	30dB± 1dB	
Operating Temperature	-40 to +85° C	
Storage Temperature	-40 to +95° C	

CW 100W-30dB ISO-ATTENUATOR MODEL: RFSL2817-A30

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS (INCHES): TOLERANCES ARE:	THIRD ANGLE PROJECTION		DECL (A)				
1 PLACE DECIMAL ±.2 [±.01] ANGULAR: ±1.0° SURFACE ROUGHNESS 16	APPROVALS	DATE			TVI 🦞		
REMOVE ALL BURRS AND BREAK SHARP EDGES.	DRAWN BY:						
SURFACE TEXTURE TO BE IN ACCORDANCE WITH LATEST ANSI B46.1 DIMENSIONING & TOLERANCING IN ACCORDANCE WITH LATEST ANSI Y14.5	CHECKED BY:		TITLE				
PROPRIETARY NOTE: "THE INFORMATION CONTAINED ON THIS DOCUMENT IS CONSIDERED TO BE CONFIDENTIAL MATERIAL PROPRIETARY TO RE	DESIGN BY:		OUTLINE/SPECS				
CIRCULATOR ISOLATOR Inc. (RFCI) AND IS PROVIDED SOLELY FOR	ENGINEER BY:		1	O	JILINE/OI		
INFORMATION PURPOSES. THIS INFORMATION SHALL NOT BE USED BY ANYONE OTHER THAN RFCI TO	MFG. ENGR.		SIZE CAGE NO. DWG NO.				TREV.
DESIGN OR CONSTRUCT ANY OF THE ITEMS DEPICTED, NOR SHALL IT BE DISCLOSED, DUPLICATED, OR COPIED FOR ANY PURPOSE, NOR MADE	Q.A.		1 A				``` `
AVAILABLE TO ANY THIRD PARTY WITHOUT THE PRIOR WRITTEN CONSENT OF A RFCI OFFICIAL."	PROG. MGMT/MKT		 A	`	SL2817-A3	30-05	A
DO NOT SCALE DRAWING			SCALE: FULL			SHEET 1 OF 1	