


THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY. DO NOT REVISE MANUALLY.

REVISIONS

REV.	DESCRIPTION	ECO	DATE	APPROVED
1	INITIAL RELEASE	I.R.	04/15/13	P.T

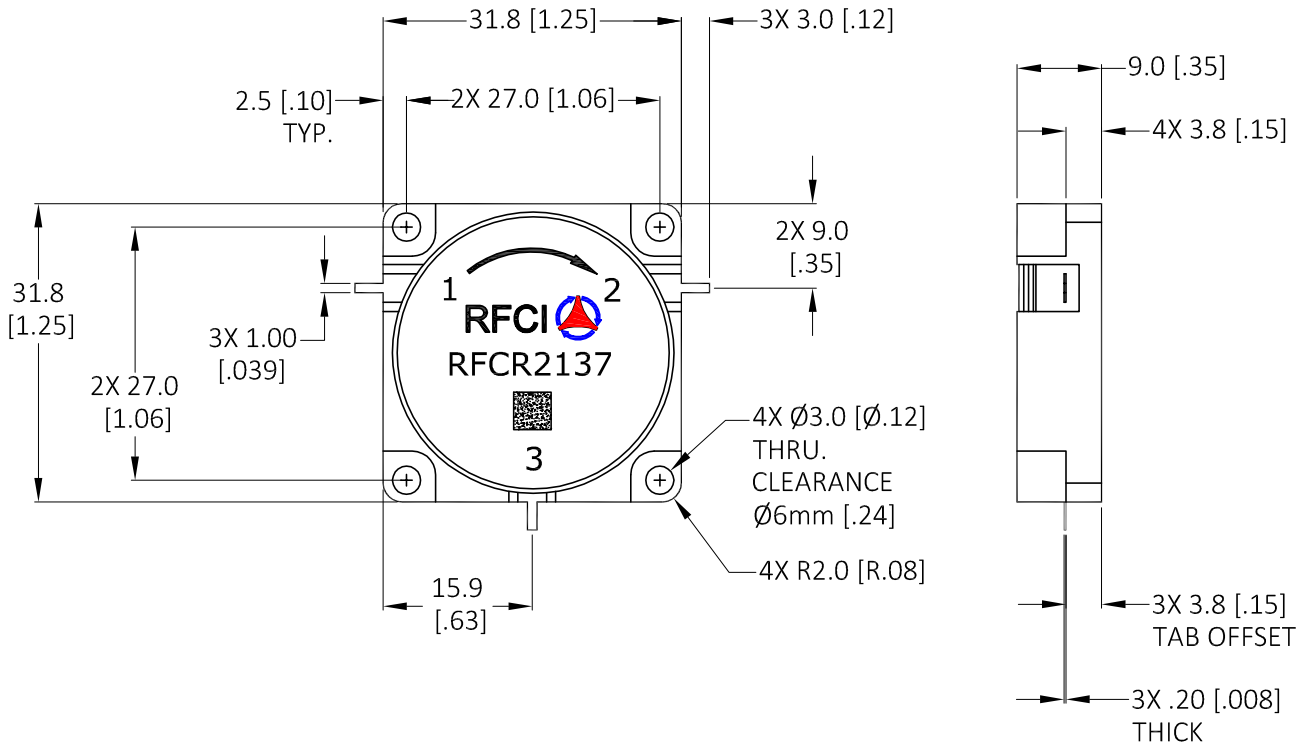

Specifications

Parameter	Minimum	Typical*	Maximum
Frequency Range (MHz)	791		821
Insertion Loss (dB)		< .20	.30
Isolation (dB)	22	>25	
Return Loss (dB)	22	>25	
FWD IMD: 2T at 37W per T 5MHz Spacing (dBc)		75	

* Typical Values Represent Mid-Band Performance @ +23 °C.

Power & Temperature Ratings

Parameter	Maximum
Forward PWR Peak/AVG	1000/200 Watts
Reverse Power CW	200 Watts
Operating Temperature	-40 to +85° C
Storage Temperature	-40 to +95° C

CW CIRCULATOR MODEL: RFCR2137

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE IN MILLIMETERS (INCHES):

TOLERANCES ARE:

1 PLACE DECIMAL ±.2 [±.01] ANGULAR: ±1.0°
2 PLACE DECIMAL ±.10 [±.004] SURFACE ROUGHNESS 16/

REMOVE ALL BURRS AND BREAK SHARP EDGES.


SURFACE TEXTURE TO BE IN ACCORDANCE WITH LATEST ANSI B46.1
DIMENSIONING & TOLERANCING IN ACCORDANCE WITH LATEST ANSI Y14.5

PROPRIETARY NOTE: "THE INFORMATION CONTAINED ON THIS DOCUMENT
IS CONSIDERED TO BE CONFIDENTIAL MATERIAL PROPRIETARY TO RF
CIRCULATOR ISOLATOR Inc. (RFCI) AND IS PROVIDED SOLELY FOR
INFORMATION PURPOSES.

THIS INFORMATION SHALL NOT BE USED BY ANYONE OTHER THAN RFCI TO
DESIGN OR CONSTRUCT ANY OF THE ITEMS DEPICTED, NOR SHALL IT BE
DISCLOSED, DUPLICATED, OR COPIED FOR ANY PURPOSE, NOR MADE
AVAILABLE TO ANY THIRD PARTY WITHOUT THE PRIOR WRITTEN CONSENT
OF A RFCI OFFICIAL."


DO NOT SCALE DRAWING

THIRD ANGLE PROJECTION



APPROVALS	DATE
DRAWN BY: HV	04/10/13
CHECKED BY: P.T	04/11/13
DESIGN BY: P.T	11/14/12
ENGINEER BY: P.T	11/14/12
MFG. ENGR. L.T	04/12/13
Q.A.	
PROG. MGMT/MKT	

RFCI



OUTLINE/SPECS

SIZE	CAGE NO.	DWG NO.	REV.
A		CR2137-OS	1

SCALE: 1/1 SHEET 1 OF 1